


Windows 2000 Fixes for the DOS Program for MCACES 5.30A

To get the BHI network to send LPT1 DOS print commands to the printer open the RUN widow and type in “CMD”, then hit enter or the OK button. In the DOS window that opens add the following line (this information was provided by Bechtel Hanford, Gene Stevens phone 509-375-9698):


net use lpt1 \\bhi-print07\2d19 /PERSISTENT:YES

Printer path
on network

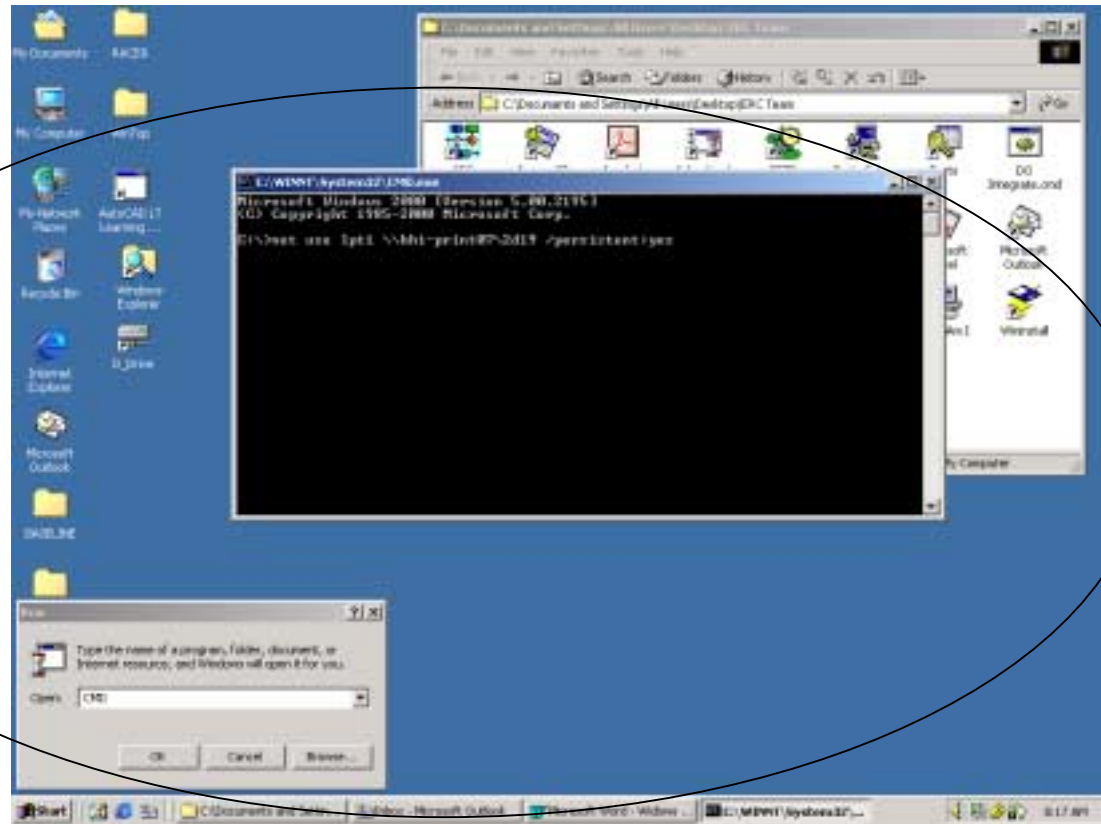

Windows 2000 Fixes for the DOS Program for MCACES 5.30A

To have MCACES run properly set Command History Number of Buffers and Buffer Size to 150 (properties of the window while MCACES is running in Window mode) and set Display option to Full Screen (this fix was provided the US Army Corps of Engineers, Karl Pankaskie, phone 509-527-7517).

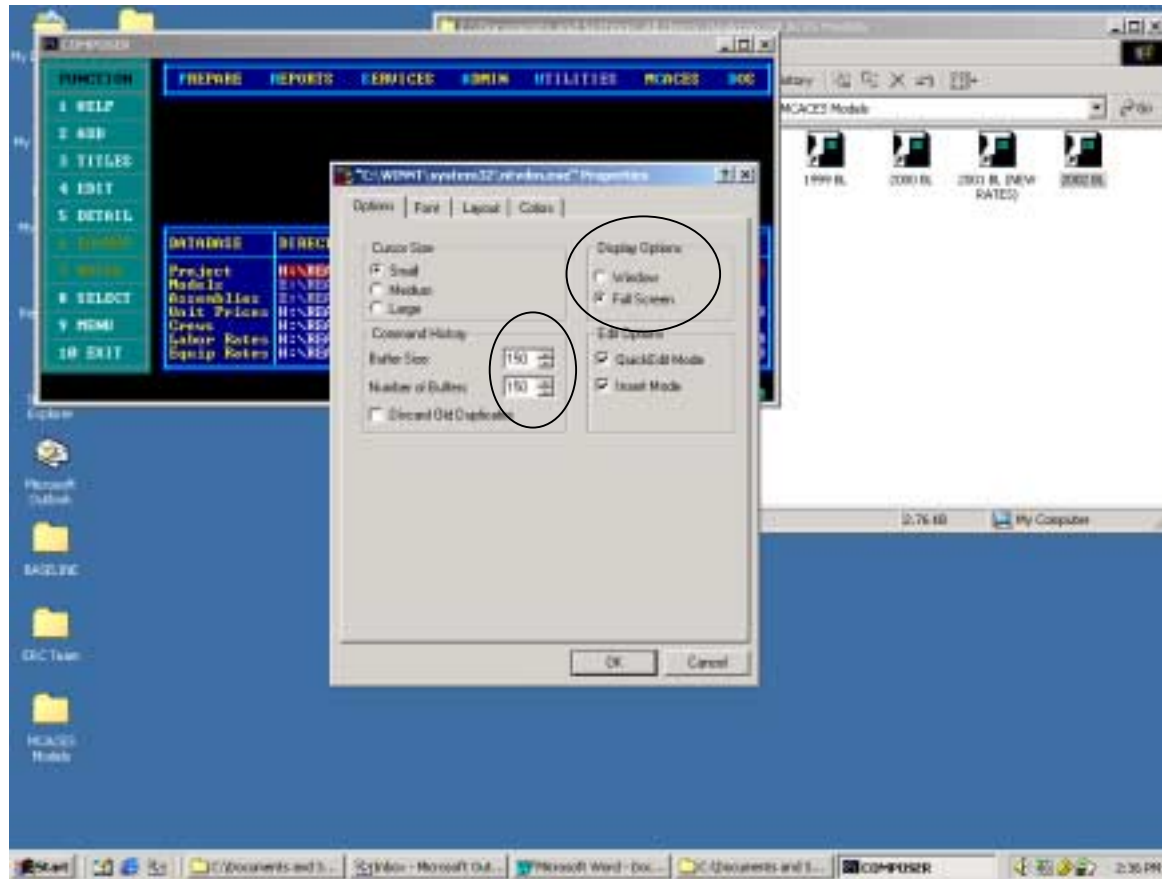

Windows 2000 Fixes for the DOS Program for MCACES 5.30A

Also, the Memory & Screen Usage properties for the Icon that runs MCACES needs to be set as follows (this information was provided by Bechtel Hanford, Jeff LaPierre 509-372-9104):

